

Rec'd

PTO

12 APR 2005

10/531019

PCT/IB 03/04172

17.09.03



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 03 OCT 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079279.2

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

BEST AVAILABLE COPY

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)



Anmeldung Nr:  
Application no.: 02079279.2  
Demande no:

Anmeldetag:  
Date of filing: 16.10.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Method and device for managing defective storage units on a record carrier

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G11B20/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

## Method and device for managing defective storage units on a record carrier

The present invention relates to a method of managing defective storage units on a record carrier, in particular on a rewritable optical record carrier. Further, the present invention relates to a corresponding device, to a recording apparatus, to a record carrier and to a computer program for implementing said method.

5

An erasable optical disc and optical information recording and reproducing apparatus having means for managing defective sectors are disclosed in EP 0 272 029 A2. The optical disc comprises a plurality of track blocks each comprising data sectors for recording data thereon, alternate sectors for substituting defective ones of the data sectors and at least one mapping sector for recording mapping data representing the address correspondence between the defective sectors and the alternate sectors substituting the defective sectors. Mapping data is recorded on the mapping sector in the same block and, at the time of data reproduction or data re-writing, the address information of the alternate sector is detected from the mapping sector of the block to which the alternate sector belongs, so that the data can be reproduced from or re-written on the alternate sector at a high speed.

10

15

It has been found that, in particular on rewritable optical record carriers, such as a DVD+RW disc, a defect may be very heavy and may cause servo errors causing the drive to map storage units, i.e. sectors (access blocks) or storage blocks, such as ECC blocks, which are still "iced", i.e. on which no data are still recorded. In this state the molecules of a recordable disc's surface all have the same state, namely the "crystalline" state which is called "iced". Since according to the known methods only defective storage units are mapped in the mapping storage unit or a defective storage unit list it happens that in case of a severe error a drive, in particular a DVD-ROM drive, after tracking over the error of the defective storage unit, can not regain synchronization fast enough to read the subsequent storage units following the defective storage units.

20

25

It is thus an object of the present invention to provide a method and a corresponding device which allow a drive to get into synchronization after tracking over a defective storage unit. Further, a corresponding record carrier and a computer program for implementing said method shall be provided.

5           This object is achieved according to the present invention by a method as claimed in claim 1 comprising the steps of:

- 
- storing first user data, which are stored or shall be stored in a first user storage unit identified as a defective storage unit, in a first alternate storage unit,
  - storing second user data, which are stored or shall be stored in second user storage units  
10       located before and/or behind said first user storage unit identified as defective storage unit, in second alternate storage units, and
  - storing address entries of said first and second alternate storage units in a defective storage unit list to be used for accessing said first and second user data instead of address entries of said first and second user storage units.

15           This object is further achieved by a device as claimed in claim 6 comprising:

- data storage means for storing first user data, which are stored or shall be stored in a first user storage unit identified as a defective storage unit, in a first alternate storage unit and for storing second user data, which are stored or shall be stored in second user storage units located before and/or behind said first user storage unit identified as defective  
20       storage unit, in second alternate storage units, and
- address storage means for storing address entries of said first and second alternate storage units in a defective storage unit list to be used for accessing said first and second user data instead of address entries of said first and second user storage units.

25           A recording apparatus for recording data on a record carrier comprising such a device for managing defective storage units is claimed in claim 7. A corresponding record carrier, in particular a recordable optical record carrier, is defined in claim 8. A computer program for implementing the method according to the invention is defined in claim 9. Preferred embodiments of the invention are defined in the dependent claims.

30           The present invention is based on the idea to map not only defective storage units as defective but also one or more storage units following or being located before a defective storage unit, i.e. a first user storage unit, or a plurality of subsequent defective storage units to ensure that a drive need not read the contents from these storage units, called second user storage units, but from the corresponding second alternate storage units mapped in the defective storage unit list. To read data following a defect the drive must "turn on" its

laser several storage units before the user storage unit it wants to read. If the laser is turned on when the drive passes over a severe defect, its phase locked loop (PLL) will not lock causing a synchronization error before the data it needs to read.

5 According to particular embodiments, e.g. for DVD, a decoder uses the clock generated when reading block N for reading block N-1 which is still in its internal buffer. It is therefore proposed to map also one or more storage units located before storage units which have been detected as defective.

10 In a preferred embodiment there is a particular defect area provided, for instance in the data zone arranged between a lead-in zone and a lead-out zone of an optical record carrier, where said first and second alternate storage units are located. This defect area is a particular reserved area for storing only user data which are originally stored or should have been stored in user storage units, in particular of the data zone. The defective storage unit list is usually stored in a different section of the defect area than the data itself.

15 While according to one embodiment single sectors are mapped, according to another embodiment not only single sectors, but one or more whole ECC blocks located before and/or behind a defective storage unit, e.g. a defective ECC block, are stored in second alternate storage units, in particular in second alternate ECC blocks. Furthermore, it is preferred to store the data in the same sequence of storage units in alternate storage units as they were or should have been stored in user storage units.

20

The present invention will now be explained in more detail with reference to the drawings in which

25 Fig. 1 shows the layout of the different zones of an optical record carrier and Fig. 2 shows a flow-chart illustrating the method according to the present invention.

30 Fig. 1 shows the different zones of the memory on an optical record carrier, in particular on a DVD+RW. Generally an optical record carrier has a lead-in zone, in particular for storing administrative data, a data zone for storing user data and a lead-out zone for storing administrative data. In the lead-in zone there is a defective storage unit list DSL storing paired physical addresses. The first address of the pair is an address in the user area UA of the data zone and the second one in the defect area SA of the data zone. Paired

addresses in the defect storage unit list DSL imply that a storage unit, i.e. a storage block (ECC block), in the defect area SA is to be accessed instead of its paired storage unit, i.e. a storage block (ECC block), in the user area UA. In effect, the storage unit in the user area UA has been "mapped" into the defect area SA. Mapping primarily occurs when a defective storage unit in the user area UA is encountered. A storage unit is considered defect after an unsuccessful read action.

The present invention shall now be illustrated with reference to Fig. 2 showing a flow-chart of said method. Shown is in step S1 a read or a recording action for accessing a particular user storage unit to read user data stored therein or record user data therein. If said action is successful (S2) the next read or recording action (S1) can be performed. If, however, the read or recording action is not successful (S2) the user storage unit that should have been accessed is considered to be a defective storage unit (S3). In the next step S4 the user storage unit U1 detected as defective storage unit is marked accordingly. However, to avoid synchronization errors also one or more user storage units before (U4, U5) and one or more user storage units after (U2, U3) the actual defective storage unit U1 are also marked as defective storage units so as to avoid that the drive tries to access these storage units which may cause synchronization errors.

The data already stored in the user storage units U1-U5 marked as defective storage units or user data which should have been stored therein are thereafter stored in the alternate storage units A1-A5 located in the defect area SA2 to which the defective user storage units U1-U5 are mapped in this example (S5).

The addresses of the alternate storage units A1-A5 are then entered into the defective storage unit list DSL thus indicating that not the original user storage units U1-U5 shall be accessed by a drive but the alternate storage units A1-A5 (step S6).

While conventionally only the defective storage unit itself (U1) would have been mapped, according to the present invention also non-defective storage units are mapped into the defect area to provide a "run-in" and a "run-out" zone for a drive accessing the record carrier so that no synchronization errors appear and user data stored in storage units located immediately before or after a defective storage unit can be read correctly.

A "run-in" zone can be considered as a zone of dummy data which an EFM decoder can use to come into synchronization. This is required since an EFM code contains its own clock information. This implies that, in order to read and decode an EFM code a clock must be running and be in synchronization with the data. This means that the very first sequence of EFM data can never be read since it takes time to get a clock into

synchronization. Further a "run-out" zone ensures proper handling of data if the EFM decoding stops. Otherwise data which had already been read, may not be handled correctly because it has no data following it since the clock for handling the data is derived from the EFM.

- 5                   According to the present invention one or more correct user storage units, in particular sector or more preferable storage blocks, located before one single or a plurality of subsequent defective storage units shall also be marked as defective storage units and mapped onto a defect area. The number of correct user storage units before or after a defective storage units that shall be mapped depends on the size of the defect. Not only single
- 10                   sectors could be mapped, but also one or more complete ECC blocks each containing a number of sectors, for instance 16 sectors.

## CLAIMS:

1. A method of managing defective storage units on a record carrier, in particular on a rewritable optical record carrier, comprising the steps of:
  - storing first user data, which are stored or shall be stored in a first user storage unit identified as a defective storage unit, in a first alternate storage unit,
  - 5 - storing second user data, which are stored or shall be stored in second user storage units located before and/or behind said first user storage unit identified as defective storage unit, in second alternate storage units, and
  - storing address entries of said first and second alternate storage units in a defective storage unit list to be used for accessing said first and second user data instead of address
  - 10 entries of said first and second user storage units.
2. A method as claimed in claim 1, wherein said first and second alternate storage units are located in a defect area.
- 15 3. A method as claimed in claim 1, wherein said storage unit is a sector or a storage block, in particular an ECC block.
4. A method as claimed in claim 1, wherein second user data, which are stored or shall be stored in second user storage units located before and/or behind said first user
- 20 storage unit identified as defective storage unit, are stored in second alternate storage units.
5. A method as claimed in claim 1, wherein said second alternate storage units are located before and/or behind said first alternate storage unit.
- 25 6. A device for managing defective storage units on a record carrier, in particular on a rewritable optical record carrier, comprising:
  - data storage means for storing first user data, which are stored or shall be stored in a first user storage unit identified as a defective storage unit, in a first alternate storage unit and for storing second user data, which are stored or shall be stored in second user storage



units located before and/or behind said first user storage unit identified as defective storage unit, in second alternate storage units, and

- address storage means for storing address entries of said first and second alternate storage units in a defective storage unit list to be used for accessing said first and second user data instead of address entries of said first and second user storage units.

5

---

7. Recording apparatus for recording data on a record carrier, in particular on a rewritable optical record carrier, comprising a device for managing defective storage units as claimed in claim 6.

10

8. A record carrier, in particular rewritable optical record carrier, comprising:
- a first alternate storage unit for storing first user data, which should be stored in a first user storage unit identified as a defective storage unit,
  - second alternate storage units for storing second user data, which should be stored in
- 15 second user storage units located before and/or behind said first user storage unit identified as defective storage unit, and
- a defective storage unit list for storing address entries of said first and second alternate storage units, which defective storage unit list is to be used for accessing said first and second user data instead of address entries of said first and second user storage units.


20

9. Computer program comprising computer program means for causing a computer to perform the steps of the method as claimed in claim 1 when said computer program is run on a computer.

**ABSTRACT:**

The present invention relates to a method and a corresponding device for managing defective storage units on a record carrier, in particular on a rewritable optical record carrier. To avoid synchronization errors of a drive when accessing storage units following or located before a defective storage unit it is proposed according to the present  
5 invention not only to map the actual defective storage unit (U1) but also one or more storage units (U2-U5) located before and/or after the defective storage unit (U1) as defective.

(Fig. 2)

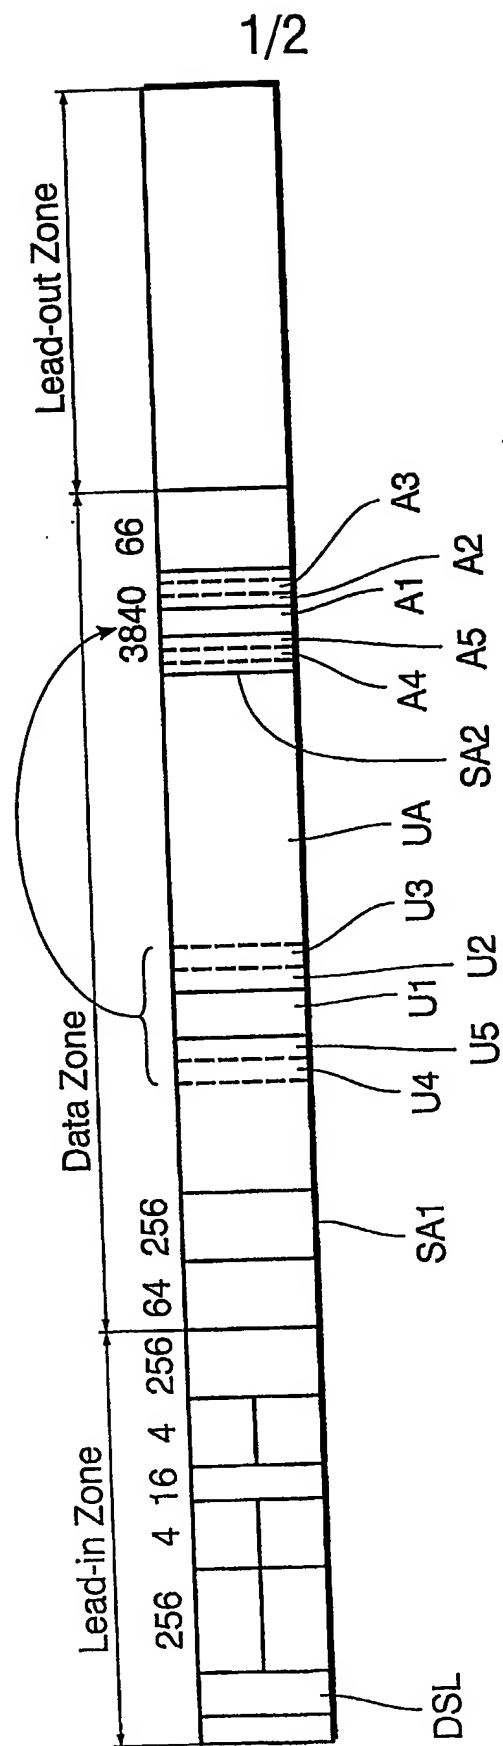

**FIG. 1**

2/2

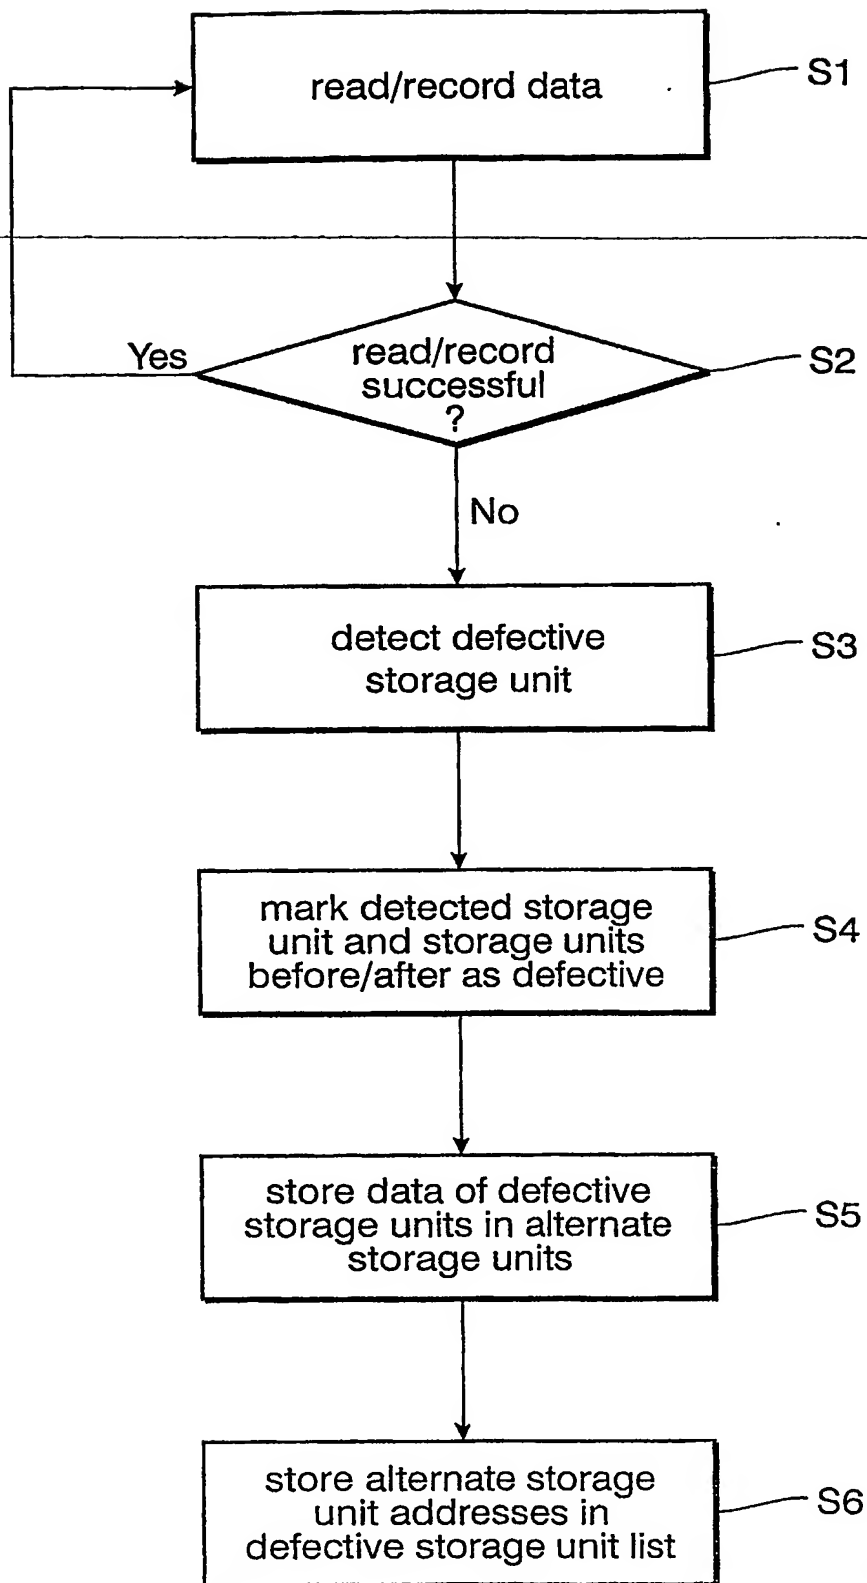


FIG.2

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**